




ADSL Transformers for Globespan Chipsets

Features


- complies with ANSI and ETSI requirements
- matched to Globespan's DMT G7000, EL-1501, G7266 and G7266RT chipsets
- very low THD
- 1500V minimum isolation
- all materials approved to UL94V-0
- manufactured in ISO-9001:2000, TS-16949:2002 and ISO-14001:2004 certified Talema facility
- fully RoHS compliant and meets lead free reflow level J-STD-020C

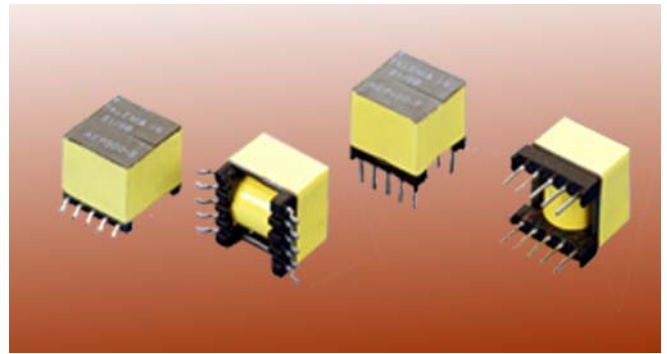


Electrical Specifications @ 25°C • Operating Temperature -40° to +85°C

Part Number	Package	IC Driver	Turns Ratio $\pm 2\%$ Line : IC	L_P (μH)	L_L (μH) Max	C_{ww} (pF) Max	DCR (Ohms) Max Line / IC	THD (Linearity) Typical	Longitudinal Balance Min	Insertion Loss Max	Freq. Response Max	Isolation Voltage (Vrms)
AEP500-S	SMD	G7000 CPE	2 : 1	435 $\pm 6\%$	10	40	1.30 / 1.50	-80dB 100kHz	-40dB 20kHz-1.1MHz	0.5dB 722kHz	0.5dB 30kHz-1.1MHz	1500
AEP510-T AEP510-S	TH SMD	G7000 CO	1.4 : 1	441 $\pm 6\%$	6	40	1.05 / 0.85	-70dB 200kHz	-60dB 20kHz-1.1MHz	0.5dB 722kHz	1.0dB 150kHz-1.5MHz	1500
AEP520-T AEP520-S	TH SMD	EL-1501 CPE	1 : 1	407 $\pm 6\%$	10	40	1.40 / 1.20	-85dB 100kHz	-50dB 30kHz-1.1MHz	0.5dB 722kHz	3.0dB 30kHz-2.0MHz	1500
AEP530-T AEP530-S	TH SMD	EL-1501 CPE	1 : 1	407 $\pm 6\%$	10	40	1.40 / 1.20	-85dB 100kHz	-50dB 30kHz-1.1MHz	0.5dB 722kHz	3.0dB 30kHz-2.0MHz	1500
AEP540-T AEP540-S	TH SMD	EL-1501 CO	1 : 1.4	483 $\pm 10\%$	10	50	1.30 / 2.45	-85dB 100kHz	-50dB 30kHz-1.1MHz	0.5dB 722kHz	3.0dB 30kHz-2.0MHz	1500
AEP550-T AEP550-S	TH SMD	G7266 CO	1.41 : 1	474 $\pm 10\%$	12	40	1.10 / 0.85	-80dB 100kHz	-50dB 30kHz-1.1MHz	1.0dB 722kHz	0.5dB 100kHz-1.1MHz	1500
AEP560-S	SMD	G7266RT	2 : 1	440 $\pm 5\%$	6	40	1.90 / 0.95	-80dB 100kHz	-50dB 30kHz-1.1MHz	1.0dB 722kHz	0.5dB 100kHz-1.1MHz	1500
AEP570-S	SMD	Nova	2 : 1	100 $\pm 5\%$	12	50	1.04 / 0.48	-90dB 50kHz	50dB 20kHz-1.1MHz	1.0dB 500kHz	0.5dB 100kHz-1.1MHz	1500


Package "S"

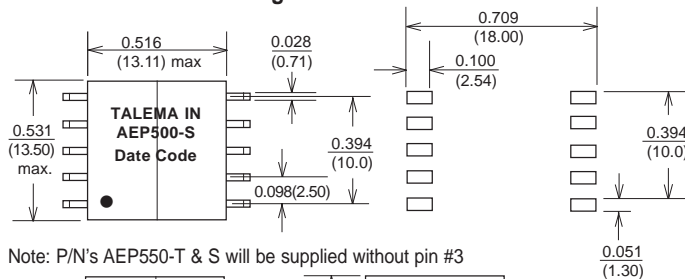


Note: P/N's AEP550-T & S will be supplied without pin #3

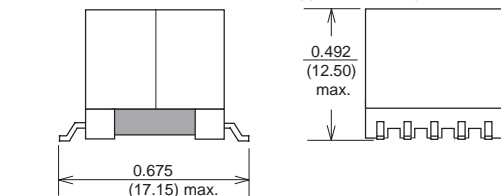


AEP500-S
AEP510-T & S
AEP530-S
AEP570-S




AEP550-T & S
AEP560-S




AEP520-T & S
AEP540-T & S



AEP530-T



Package "T"

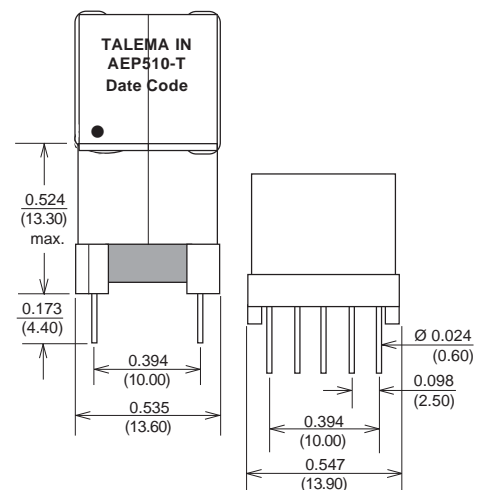

Dimensions: Inches (Millimeters)
 Tolerance: ± 0.010 (0.25)

Weight: 6.8 grams

Germany: Int.+49 89 - 841 00-0 • Ireland: Int.+35 374 - 954 8666 • Czech Rep: Int.+420 37 - 744 9303 • India: Int.+91 427 - 2441325
<http://www.talema-nuvotem.com>